

iDS-7216HQHI-M2/XT**16-ch 1080P 1U H.265 AcuSense DVR****Key Feature**

- 16 channels and 2 HDD 1U AcuSense DVR
- Support 4-ch Facial Recognition or 8-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Support 8-ch AcuSearch Technology
- Efficient H.265 pro+ compression technology
- Encoding ability up to 3K/5MP Lite@12fps
- Up to 24 channels IP camera inputs, each channel up to 6MP
- Up to 24*1080P@30fps decoding ability
- 5 signals input adaptively (HDTV/AVD/CVI/CVBS/IP)
- Support All channels Motion Detection Technology
- Support All channels HDTV/ Two-Way Audio technology

**Compression and Recording**

- H.265 Pro+ can be enabled to improve encoding efficiency and reduce data storage costs
- Recording at up to 3K / 5 MP Lite resolution

Smart Function

- Up to 16 channels (analog channel) Motion Detection 2.0
- Up to 8 channels (advanced model, analog channel) Perimeter Protection
- Up to 4 channels (advanced model, analog channel) human face recognition
- Support smart playback to enhance playback efficiency

Network & Ethernet Access


- Support Hik-Connect & DDNS (Dynamic Domain Name System)
- Output bandwidth limit configurable

▪ Specification

Facial Recognition	
Face Picture Library	Up to 16 face picture libraries; HDD damage will not cause data loss in the face picture library, because the library has been backed up by HDD and flash.
Face Picture Comparison	4-ch face picture comparison alarm (HD analog camera)
Motion Detection 2.0	
Human/Vehicle Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights; Quick search by object or event type is supported;
Perimeter Protection	
Human/Vehicle Analysis	Up to 8-ch (advanced model)
Facial Detection	
Facial Detection and Capture	Face picture detection, face picture search ; 4-ch face picture capture
Video and Audio	
IP Video Input	8-ch (up to 24-ch), each up to 6MP
Analog Video Input	16-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDMI Output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz
CVBS Input	PAL/NTSC
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Synchronous Playback	16-ch
HDTVl Input	3K(2960 × 1665)@25/20fps, 3K(3328x1504)@20fps,5 MP(2560 × 1944)@20 fps, 4 MP(2560 × 1440)@25/30fps,1080P@25/30 fps, 720P@25/30fps
AHD Input	5 MP(2560 × 1944)@20 fps, 4 MP(2560 × 1440)@25/30 fps,1080P@25/30 fps, 720P@25/30fps
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz
HDCVI Input	3K(2880×1620)@25fps, 5MP(2592 × 1944)@20 fps, 4MP(2560 × 1440)@25/30 fps,1080P@25/30 fps, 720P@25/30fps
Video Output Mode	HDMI/VGA simultaneous output
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Audio Input	1-ch, RCA (2.0 Vp-p, 1 KΩ), 16-ch via coaxial cable
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)
Recording	
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding Resolution	When 1080p Lite mode is not enabled: 3K lite/5 MP lite/4 MP lite/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode is enabled: 3K lite/5 MP lite/4 MP lite/1080p lite/720p lite/VGA/WD1/4CIF/CIF

Frame Rate	<p>Main stream:</p> <p>When 1080p Lite mode not enabled:</p> <p>For 3K stream access: 3K lite@12fps;4 MP lite@15fps/1080pLite@20fps;720p/WD1/4CIF/VGA/CIF@20fps</p> <p>For 5 MP stream access: 5 MP lite@12fps;4 MP lite@15fps/1080pLite@20fps;720p/WD1/4CIF/VGA/CIF@20fps</p> <p>For 4 MP stream access: 4 MP lite@15fps/1080pLite@25fps (P)/30fps (N) ;720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)</p> <p>For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N)</p> <p>For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N)</p> <p>When 1080p Lite mode enabled:</p> <p>3K lite/5 MP lite@12fps;4 MP lite@15fps;1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N)</p> <p>Sub-stream:</p> <p>WD1/4CIF@12fps; CIF@25fps (P)/30fps (N)</p>
Video Bitrate	32 Kbps to 6 Mbps
Dual-stream	Support main stream or sub stream
Stream Type	Video, Video & Audio
Audio Compression	G.711u
Audio Bitrate	64 Kbps
Decoding	
Decoding Capability	up to 24-ch 1080P@30fps
Network	
Total Bandwidth	256 Mbps
Network Protocol	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, ISUP
Remote Connection	128
Network Interface	1, RJ45 10/100/1000 Mbps self-adaptive Ethernet interface
Auxiliary Interface	
SATA	2 SATA interface, up to 12 TB capacity for each disk
Serial Interface	RS-485 (half-duplex)
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 2 × USB 3.0
Alarm In/Out	N/A (optional to support)
General	
Power Supply	12 VDC, 3.3 A
Consumption	≤40 W
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	384 × 317 × 52 mm (15.1 × 12.5 × 2.0 inch)
Weight	≤ 2 kg (4.4 lb)

▪ Physical Interface

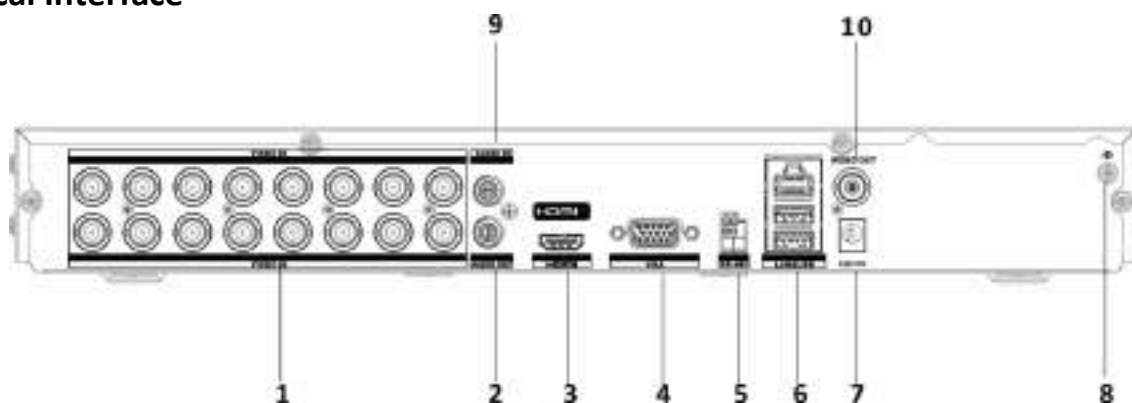


No.	Description	No.	Description
1	Video in	6	LAN network interface and USB interface
2	Audio out	7	12 VDC power input
3	HDMI interface	8	GND
4	VGA interface	9	Audio in
5	RS-485 interface	10	Video out

▪ Available Model

iDS-7216HQHI-M2/XT

Dimension

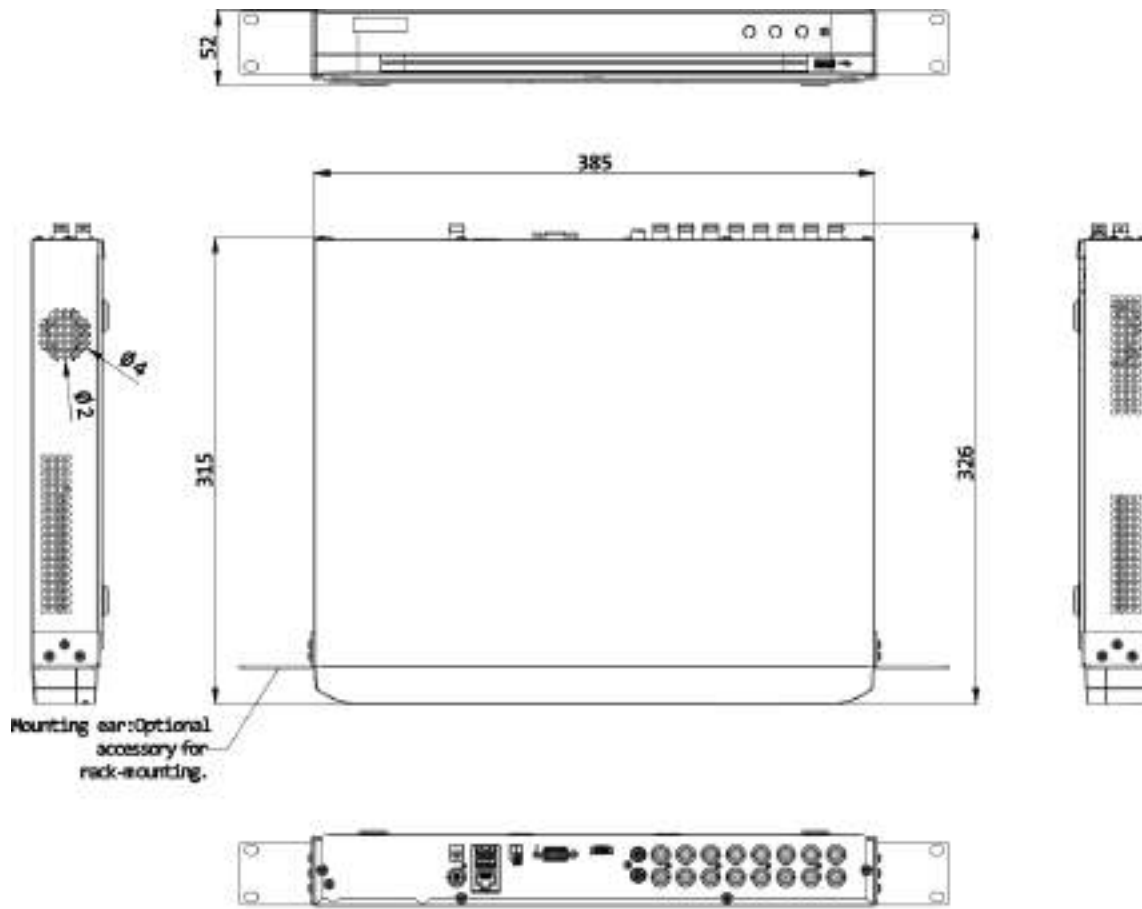

scale/1:1;Unit/mm

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION