

## DS-7700NI-I4(B) Series NVR

### Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Up to 16/32-ch IP camera inputs
- Up to 1-ch@32 MP/2-ch@12 MP/16-ch@1080p decoding capacity
- Up to 160/256 Mbps incoming bandwidth



### Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

### HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

### Storage and Playback

- Up to 4 SATA interfaces for HDD connection
- 16-ch synchronous playback

### Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm

### Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in




## Specification

| Model                      | DS-7716NI-I4(B)  | DS-7732NI-I4(B) |
|----------------------------|--|-----------------|
| <b>Video and Audio</b>     |  |                 |
| IP video input             | 16-ch  | 32-ch           |
|                            | Up to 32 MP resolution<br>*: After ultra HD resolution mode is enabled, the NVR supports up to 4-ch 32 MP/24 MP IP video inputs.   |                 |
| Incoming bandwidth         | 160 Mbps   | 256 Mbps        |
| Outgoing bandwidth         | 256 Mbps   |                 |
| HDMI 1 output              | 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz   |                 |
| HDMI 2 output              | 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz   |                 |
| VGA output                 | 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz   |                 |
| Video output mode          | HDMI1/VGA simultaneous output, HDMI2/VGA independent output  |                 |
| CVBS output                | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480  |                 |
| Audio output               | 1-ch, RCA (Linear, 1 KΩ)   |                 |
| Two-way audio input        | 1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)  |                 |
| <b>Decoding</b>            |  |                 |
| Decoding format            | H.265+/H.265/H.264+/H.264/MPEG4  |                 |
| Recording resolution       | 32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF<br>*: After ultra HD resolution mode is enabled, the NVR supports up to 4-ch 32 MP/24 MP IP video inputs. |                 |
| Synchronous playback       | 16-ch  |                 |
| Capability                 | 1-ch@32 MP (30 fps)/2-ch@12 MP (20 fps)/4-ch@8 MP (25 fps)/8-ch@4 MP (30 fps)/16-ch@1080p (30 fps)   |                 |
| Dual stream recording      | Support  |                 |
| Stream type                | Video, Video & Audio   |                 |
| Audio compression          | G.711ulaw/G.711alaw/G.722/G.726  |                 |
| <b>Network</b>             |  |                 |
| Remote connections         | 128  |                 |
| Network protocol           | TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS   |                 |
| Network interface          | 2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface   |                 |
| <b>Auxiliary Interface</b> |  |                 |
| Serial port                | 1 RS-485 (half-duplex), 1 RS-232   |                 |
| SATA                       | 4 SATA interfaces  |                 |
| eSATA (optional)           | 1 eSATA interface  |                 |
| Capacity                   | Up to 10 TB capacity for each disk   |                 |
| Alarm in/out               | 16/4 (16/8 optional)   |                 |
| USB interface              | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0  |                 |
| <b>General</b>             |  |                 |
| Power supply               | 100 to 240 VAC, 50 to 60 Hz  |                 |
| Consumption                | ≤ 20 W   |                 |


|                              |   |
|------------------------------|---|
| <b>(without HDD)</b>         |   |
| <b>Working temperature</b>   | -10 °C to 55 °C (14 °F to 131 °F)                     |
| <b>Working humidity</b>      | 10% to 90%  |
| <b>Chassis</b>               | 19-inch rack-mounted 1.5U chassis                     |
| <b>Dimension (W × D × H)</b> | 445 × 400 × 75 mm ( 17.5"× 15.7" × 3.0")              |
| <b>Weight (without HDD)</b>  | ≤ 5 kg (11 lb)  |
| <b>Certification</b>         |   |
| <b>FCC</b>                   | Part 15 Subpart B, ANSI C63.4-2014                    |
| <b>CE</b>                    | EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4 |

# Dimension

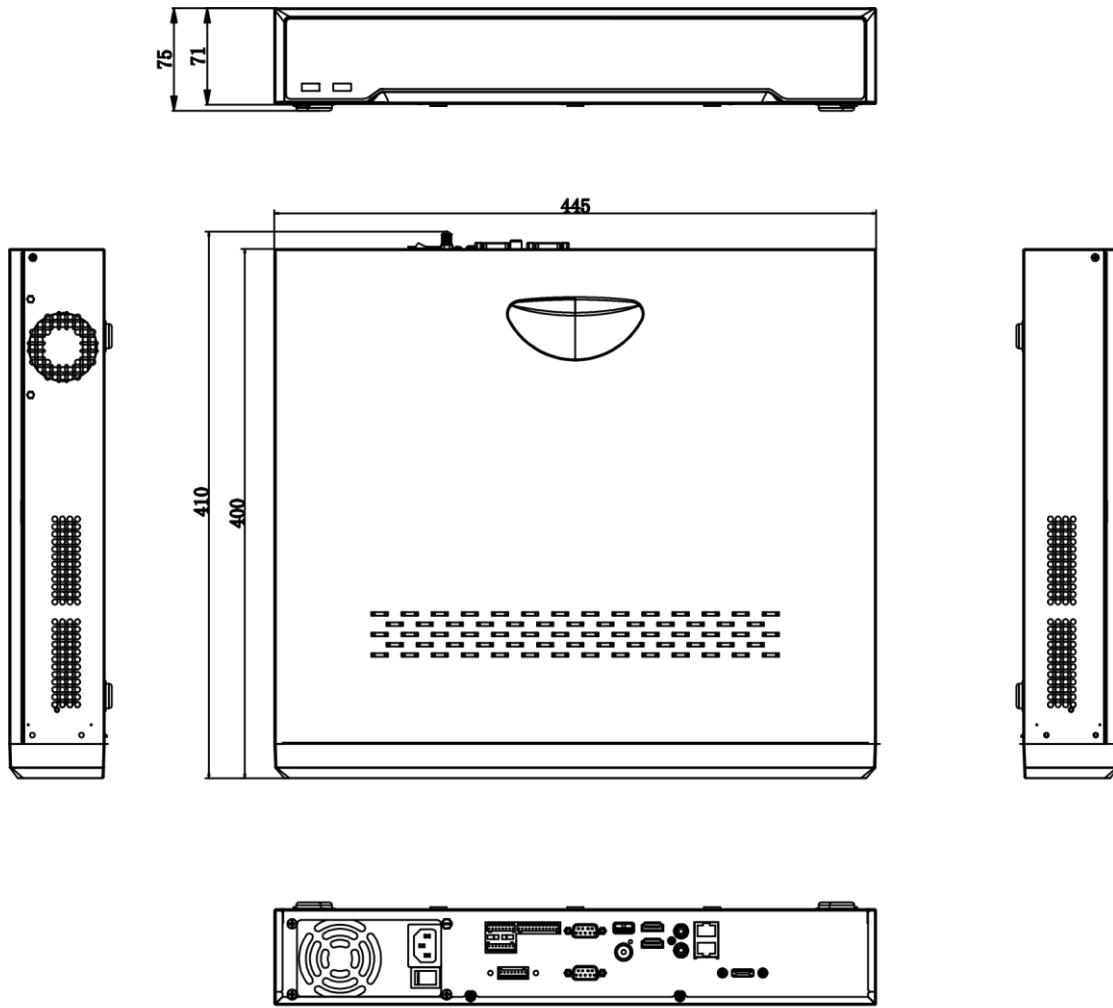

scale/1:1;Unit/mm

## Physical Interface

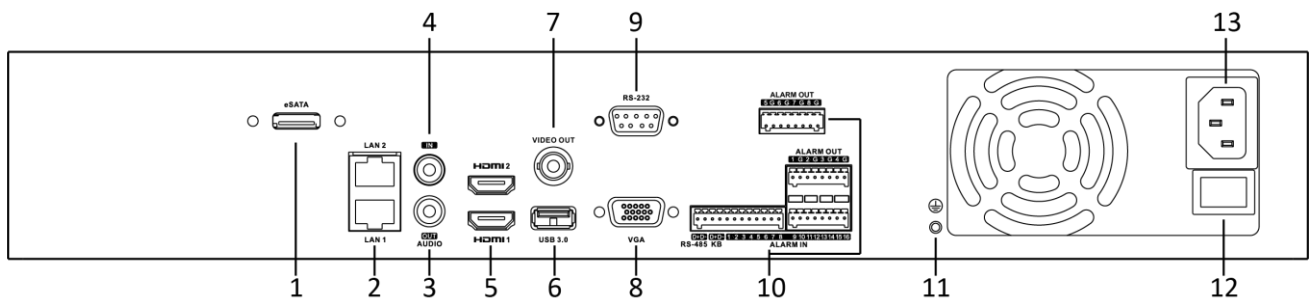

| No. | Description                  | No. | Description  |
|-----|------------------------------|-----|--|
| 1   | eSATA Interface              | 8   | VGA Output (DB9 Connector)   |
| 2   | LAN1 and LAN2 Interfaces     | 9   | RS-232 Serial Interface  |
| 3   | AUDIO OUT                    | 10  | RS-485 Serial Interface, Controller Port, ALARM IN, ALARM OUT 16/4 (16/8 optional) |
| 4   | AUDIO IN                     | 11  | GND  |
| 5   | HDMI 1 and HDMI 2 Interfaces | 12  | Power Switch   |
| 6   | USB 3.0 Interface            | 13  | 100 to 240 VAC Power Supply  |
| 7   | VIDEO OUT                    |     |  |

## Available Model

DS-7716NI-I4(B), DS-7732NI-I4(B)

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5098  
overseas@hikvision.com

**Hikvision USA**  
T +1-909-885-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8589-4233  
sales.au@hikvision.com

**Hikvision India**  
T +91-22-26469000  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-703-6630  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-279-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-8802  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0060  
latam.support@hikvision.com

**Hikvision Turkey**  
T +90 12164521 7076- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 1100 0351172  
sales.africa@hikvision.com

**Hikvision France**  
T +33011-95-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikla.pantsov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vl@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
sales.me@hikvision.com

**Hikvision Singapore**  
T +65-6884-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-56  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-67-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1701  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-659-67-99  
sales.ru@hikvision.com

**Hikvision Korea**  
T +82-1031-731-8617  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-660-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2813758  
Sales.indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com