

## DS-9600NXI-I8/S AcuSense Series NVR

### Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 1-ch facial recognition for video stream, or up to 4-ch facial recognition for face picture
- Up to 16/32/64-ch IP camera inputs
- Up to 16-ch 1080p decoding capability
- Up to 320 Mbps incoming bandwidth



### Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel IP cameras connection
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

### HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

### Storage and Playback

- Up to 8 SATA interfaces for HDD connection
- 16-ch synchronous playback at up to 1080p resolution

### Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- POS information overlay on live view and playback
- POS triggered recording and alarm




## Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in

## Typical Application


### Facial Recognition and Face Picture Comparison

Modeling and analyzing face pictures captured by cameras. Realize blacklist alarm and stranger alarm via face picture library. Search target people by picture and name features.

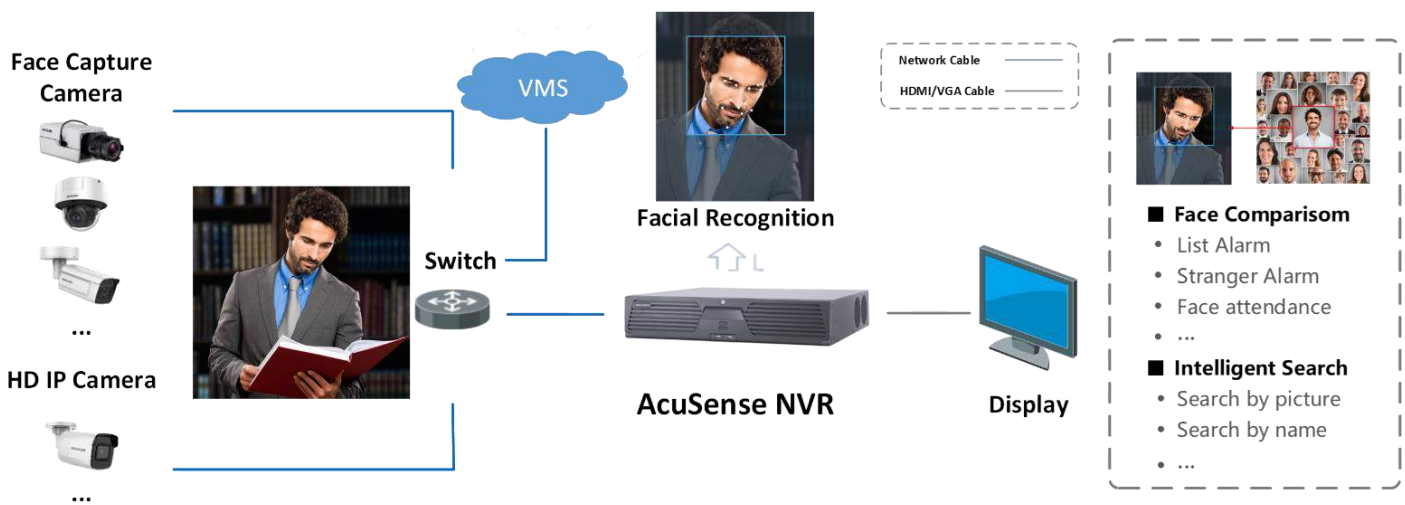

### Perimeter Protection

Adopt deep learning algorithm to reduce false alarm, effectively reduces the false alarm caused by tree branches, leaves, shadow, light, vehicles, small animals, etc.

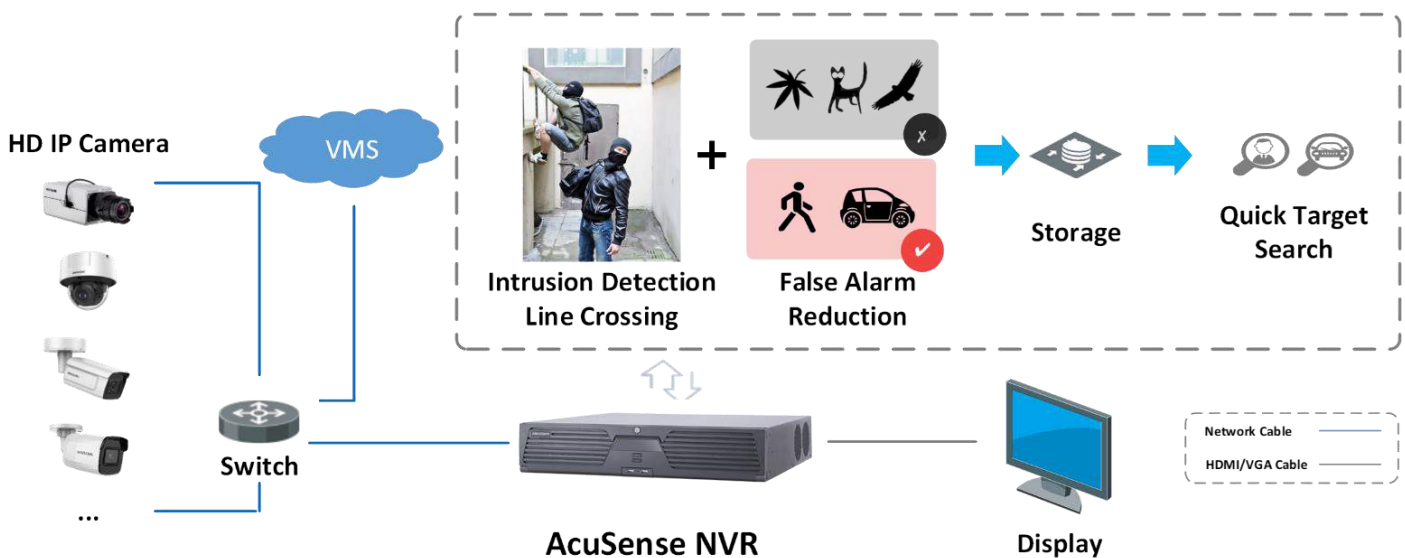


## Specification

Model	DS-9616NXI-I8/S	DS-9632NXI-I8/S	DS-9664NXI-I8/S
<b>Facial Recognition <sup>1</sup></b>			
<b>Facial detection and analytics</b>	Face picture comparison, human face capture, face picture search		
<b>Face picture library</b>	Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 15 KB, total capacity ≤ 150 MB)		
<b>Face picture comparison</b>	4-ch face picture comparison alarm		
<b>Performance of facial detection and analytics</b>	1-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)		
<b>Perimeter Protection<sup>1</sup></b>			
<b>Human/Vehicle Analysis</b>	Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition; Up to 12 rules in total		
<b>Video and Audio</b>			
<b>IP video input</b>	16-ch	32-ch	64-ch
	Up to 12 MP resolution *: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled.		
<b>Incoming bandwidth</b>	320 Mbps		
<b>Outgoing bandwidth</b>	256 Mbps		
<b>Incoming bandwidth (RAID mode)</b>	200 Mbps		
<b>Outgoing bandwidth (RAID mode)</b>	200 Mbps		
<b>HDMI1 output</b>	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
<b>HDMI2 output</b>	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
<b>VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
<b>Video output mode</b>	HDMI1/VGA simultaneous output, HDMI2/VGA independent output		
<b>Audio output</b>	2-ch, RCA (Linear, 1 KΩ)		
<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)		
<b>Decoding</b>			
<b>Video decoding format</b>	H.265+/H.265/H.264+/H.264/MPEG4		
<b>Recording resolution</b>	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF *: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled.		
<b>Synchronous playback</b>	16-ch		
<b>Capability</b>	16-ch@1080p (30 fps)		
<b>Dual stream recording</b>	Support		
<b>Stream type</b>	Video, Video & Audio		
<b>Audio compression</b>	G.711ulaw/G.711alaw/G.722/G.726/MP2L2/AAC		
<b>Network</b>			

<b>Remote connections</b>	128
<b>Network protocol</b>	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
<b>Network interface</b>	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
<b>RAID</b>	
<b>RAID Type</b>	RAID0, RAID1, RAID5, RAID6, RAID10
<b>Auxiliary interface</b>	
<b>Serial port</b>	RS-485 (full-duplex), RS-232, Keyboard
<b>SATA</b>	8 SATA interfaces
<b>Capacity</b>	Up to 10 TB capacity for each disk
<b>eSATA</b>	1 eSATA interface
<b>Alarm in/out</b>	16/8
<b>USB interface</b>	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
<b>General</b>	
<b>Power supply</b>	100 to 240 VAC, 50 to 60 Hz
<b>Consumption (without HDD)</b>	≤ 30 W
<b>Working temperature</b>	-10 °C to 55 °C (14 °F to 131 °F)
<b>Working humidity</b>	10% to 90%
<b>Chassis</b>	2U chassis
<b>Dimension (W × D × H)</b>	442 × 459 × 92 mm (17.4" × 18" × 3.6")
<b>Weight (without HDD)</b>	≤ 8.7 kg (19.2 lb.)
<b>Certification</b>	
<b>Obtained Certification</b>	CE, FCC, IC
<b>CE</b>	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4
<b>FCC</b>	Part 15 Subpart B, ANSI C63.4-2014


1: Facial recognition and perimeter protection cannot be enabled at the same time. Enable one function will make the other one unavailable.

# Dimension

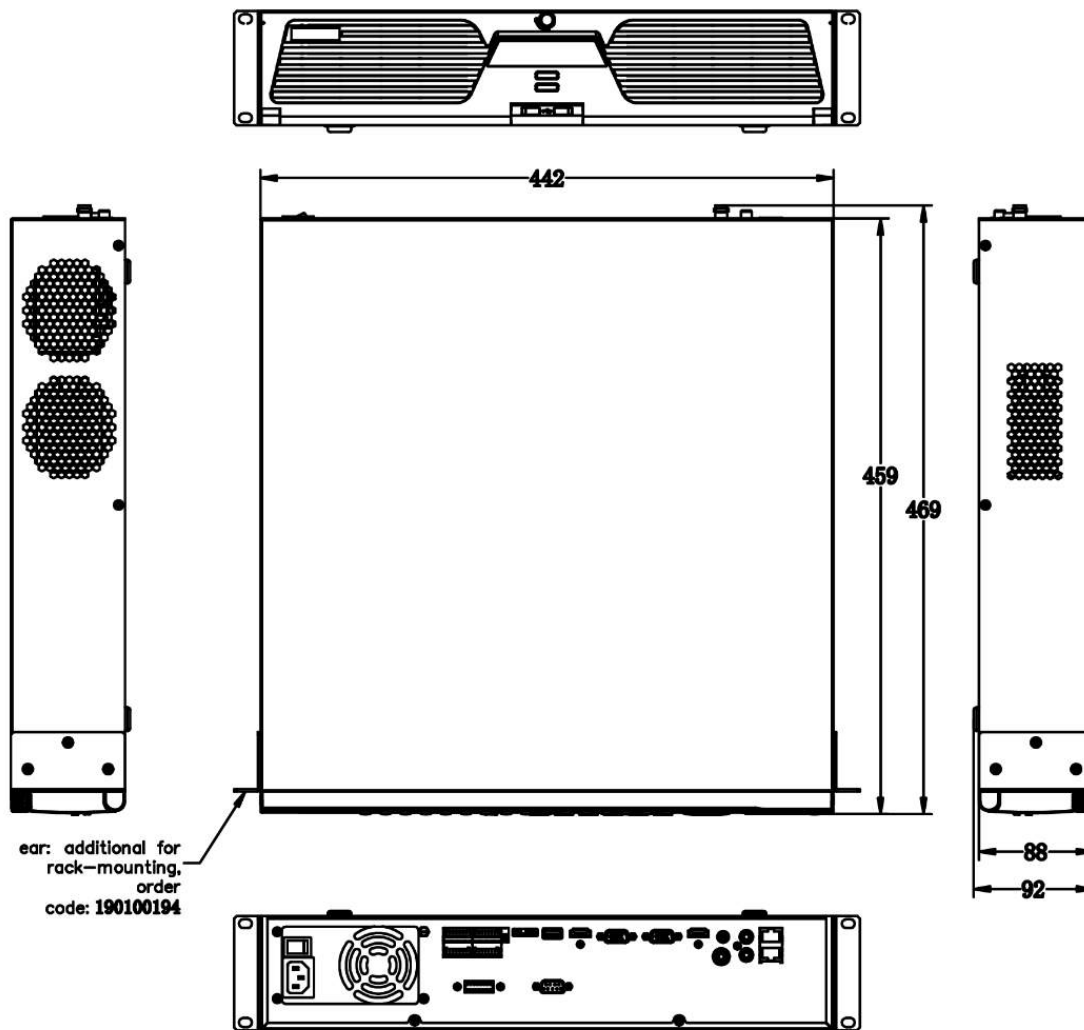

scale/1:1;Unit/mm

## Physical Interface

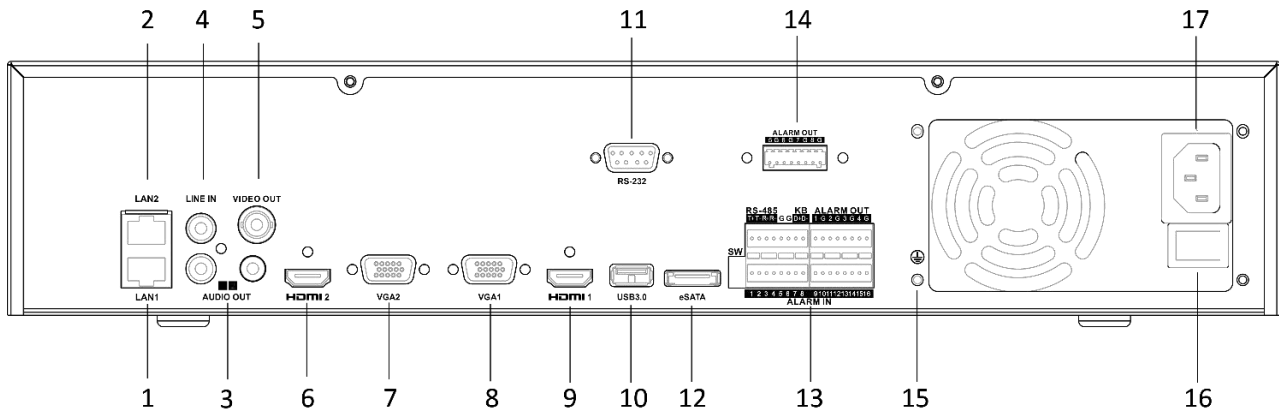

No.	Description	No.	Description
1	LAN1 interface	10	USB 3.0 interface
2	LAN2 interface	11	RS-232 serial interface
3	AUDIO OUT	12	eSATA interface
4	LINE IN	13	ALARM IN/OUT, RS-485 serial interface, Keyboard
5	VIDEO OUT	14	ALARM OUT
6	HDMI2	15	GND
7	VGA2	16	Power switch
8	VGA1	17	100 to 240 VAC power supply
9	HDMI1		

## Available Model

DS-9616NXI-I8/S, DS-9632NXI-I8/S, DS-9664NXI-I8/S



### Headquarters

No.565 Wenma Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5995  
reversebusiness@hikvision.com

**Hikvision USA**  
T +1-909-885-0100  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8595-4213  
sales.au@hikvision.com

**Hikvision India**  
T +91-22-28409900  
sales@pram@hikvision.com

**Hikvision Canada**  
T +1-866-200-8600  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0495-6002  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070-7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-882140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
safb.africa@hikvision.com

**Hikvision France**  
T +33(0)1-88-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-8730807  
nikaz@hikvision.kz

**Hikvision Vietnam**  
T +84-974270888  
sales.vi@hikvision.com

**Hikvision UAE**  
T +971-4-4452000  
sales.me@hikvision.com

**Hikvision Singapore**  
T +65-6884-9718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-15-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +00-87-1238-0438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1791  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-892-87-99  
sales.ru@hikvision.com

**Hikvision Korea**  
T +82-1031-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2033750  
Sales.indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com

04408052010127