

## DS-2CE70KF0T-PFS 3K ColorVu Indoor Audio Fixed Turret Camera



- High quality imaging with 3K, 2960 × 1665 resolution
- 24/7 color imaging with F1.0 aperture
- 2.8 mm and 3.6 mm fixed focal lens
- Up to 20 m white light distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- High quality audio with audio over coaxial cable, built-in mic




## ▪ Specification

Camera	
Image Sensor	3K CMOS
Signal System	PAL/NTSC
Resolution	2960 (H) × 1665 (V)
Frame Rate	TVI: 3K@20fps, 4 MP@25fps/30fps, 1080p@25fps/30fps AHD: 5 MP@20fps, 4 MP@25fps/30fps CVI: 4 MP@25fps/30fps CVBS: PAL/NTSC
Min. Illumination	0.001 Lux @ (F1.0, AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	2.8 mm, 3.6 mm fixed focal lens
Field of View	2.8 mm, horizontal FOV: 102°, vertical FOV: 56°, diagonal FOV: 122° 3.6 mm, horizontal FOV: 80°, vertical FOV: 45°, diagonal FOV: 96°
Lens Mount	M12
Light Alarm	Solid Light Alarm (White Light)
Day & Night	24/7 Color Imaging
WDR (Wide Dynamic Range)	Digital WDR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Image	
White Light	Auto/Off
Image Mode	STD/HIGH-SAT/HIGHLIGHT
AGC	Yes
Day/Night Mode	Color
White Balance	Auto/Outdoor/Global/Manual
AE (Auto Exposure) Mode	DWDR, BLC, HLC, Global, HLS
Noise Reduction	2D DNR
Language	English
Function	Brightness, Contrast, Mirror, Defective Pixel Correction, Sharpness, Anti-Banding, Smart Light
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
Audio In	Built-in mic
General	
Operating Conditions	-40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)
Power Supply	12 VDC ± 25%, <i>*You are recommended to use one power adapter to supply the power for one camera.</i>
Consumption	Max. 2.5 W
Material	Plastic
White Light Range	Up to 20 m
Communication	HIKVISION-C
Dimension	Φ 85.02 mm × 81.25 mm (Φ 3.35" × 3.2")
Weight	Approx. 165.5 g (0.36 lb.)

## ▪ Available Model

DS-2CE70KF0T-PFS

▪ **Dimension**

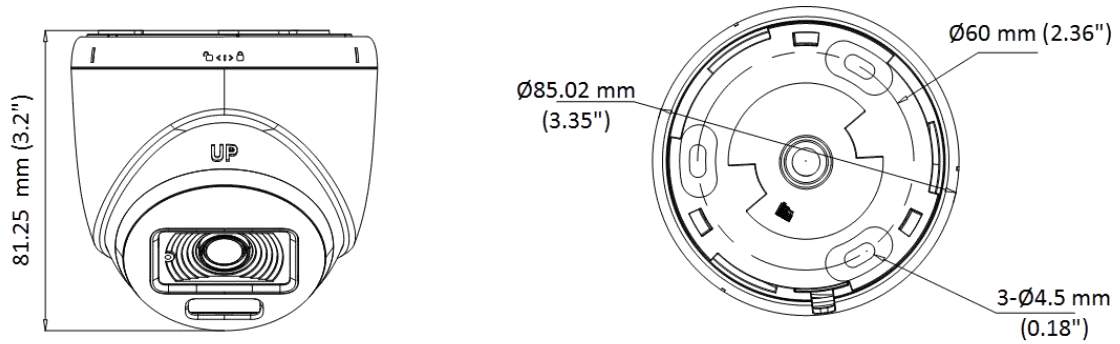

▪ **Accessory**

▪ **Optional**

DS-1275ZJ-SUS	DS-1272ZJ-110-TRS	DS-1280ZJ-XS	DS-1276ZJ-SUS
Vertical pole mount	Wall mount	Junction box	Corner mount

Distributed by

**HIKVISION****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8607-5000  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-000-855-0433  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8559-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28490000  
sales@pimahikvision.com

**Hikvision Canada**  
T +1-855-200-8583  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9940  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5540770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0435-6002  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
latam.support@hikvision.com

**Hikvision Turkey**  
T +90 3216521 7070-7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-002140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0361172  
sales.africa@hikvision.com

**Hikvision France**  
T +3300-85-330-650  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-8730667  
nikla.ponfiov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432000  
salesmea@hikvision.com

**Hikvision Singapore**  
T +65-6884-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-67-1238-9438  
urb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1703  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-869-67-99  
salesru@hikvision.com

**Hikvision Korea**  
T +82-0131-731-8617  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2953759  
Sales.indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com