

## DS-2CE17D0T-IT5F(C) 2 MP Camera




- High quality imaging with 2 MP, 1920 × 1080 resolution
- 3.6 mm, 6 mm, 8 mm, 12 mm fixed focal lens
- Up to 80 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)




## ▪ Specification

Camera	
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Frame Rate	TVI: 1080P@30fps, 1080P@25fps CVI: 1080P@30fps, 1080P@25fps AHD: 1080P@30fps, 1080P@25fps CVBS: PAL/NTSC
Resolution	1920 (H) × 1080 (V)
Min. illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s NTSC: 1/30 s to 1/50,000 s
Lens	3.6 mm, 6 mm, 8 mm, 12 mm fixed lens
Horizontal Field of View	3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8° 8 mm, horizontal FOV: 39.9°, vertical FOV: 21.9°, diagonal FOV: 46.5° 12 mm, horizontal FOV: 24.6°, vertical FOV: 13.9°, diagonal FOV: 28.1°
Lens Mount	M12
Day & Night	ICR
WDR (Wide Dynamic Range)	Digital WDR
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360°
Menu	
Image Mode	STD/HIGH-SAT
AGC	Yes
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	Auto/Manual
AE (Auto Exposure) Mode	DWDR/BLC/HLC/Global
Language	English
Functions	Brightness, Sharpness, Smart IR
2D DNR	Yes
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12 VDC ± 25%
Power Consumption	Max. 4.7 W
Protection Level	IP67
Material	Front Cover: Metal Main Body: Plastic
IR Range	Up to 80 m
Communication	HIKVISION-C
Dimensions	78.9 mm × 75.4 mm × 216.6 mm (3.10" × 2.97" × 8.53")
Weight	Approx. 320 g (0.71 lb.)

## ▪ Dimension

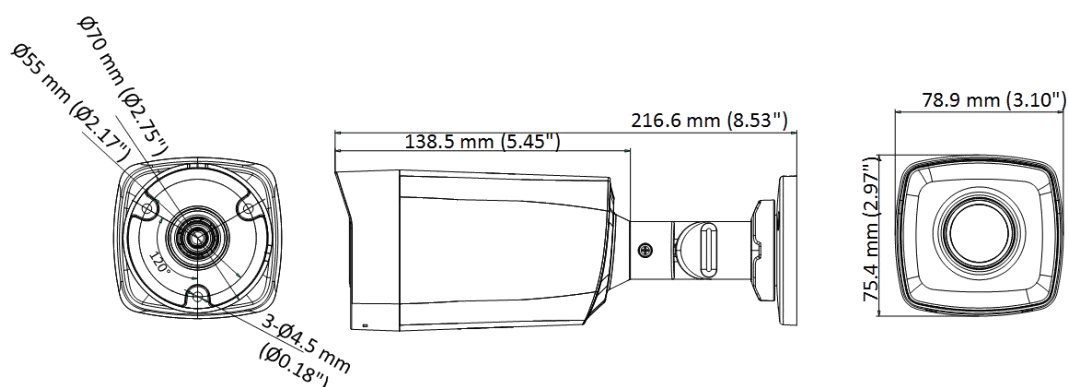

## ▪ Accessory



DS-1280ZI-XS

## ▪ Available Model

DS-2CE17D0T-IT5F(C)

Distributed by



# HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
ov@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8598-4233  
sales.au@hikvision.com

**Hikvision India**  
T +91-22-28469800  
sales@pramohikvision.com

**Hikvision Canada**  
T +1-866-200-8600  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-8948  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0498-6002  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3338-0850  
Latin.support@hikvision.com

**Hikvision Turkey**  
T +90 (212)521 7070 / 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-2652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01828-002140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (0) 0351172  
saa.ahfca@hikvision.com

**Hikvision France**  
T +3301-85-330-050  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-3730607  
nkia.pantfiyev@hikvision.ru

**Hikvision Vietnam**  
T +84-074270868  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
sales.me@hikvision.com

**Hikvision Singapore**  
T +65-0084-6718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-10-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-8436  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-659-57-99  
salm.ru@hikvision.com

**Hikvision Korea**  
T +82-1031-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com