

## DS-2CE12HFT-F 5 MP Full Time Color Camera

ColorVu



- 5 MP, 2560 × 1944 resolution
- 24-hour color image
- 130 dB true WDR, 3D DNR
- 3.6 mm, 6 mm fixed focal lens
- Smart Light, up to 40 m white light distance
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67



## Specification


Camera	
Image Sensor	5 MP CMOS
Signal System	PAL/NTSC
Resolution	2560 (H) × 1944 (V)
Frame Rate	TVI: 5MP@20fps, 4MP@30fps, 4MP@25fps, 1080p@30fps, 1080p@25fps CVI: 4MP@30fps, 4MP@25fps AHD: 5MP@20fps, 4MP@30fps, 4MP@25fps CVBS: PAL/NTSC
Min. illumination	0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Slow Shutter	Max. 16 times
Lens	3.6 mm, 6 mm fixed lens
Horizontal Field of View	80.1° (3.6 mm), 49.3° (6 mm)
Lens Mount	M16
Day & Night	Color
WDR (Wide Dynamic Range)	≥130 dB
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360°
Menu	
White Light	Auto/Off
Image Mode	STD/HIGH-SAT
AGC	Yes
Day/Night Mode	Color
White Balance	Auto/Manual
AE (Auto Exposure) Mode	WDR/BLC/HLC/Global/HLS/Anti-banding
Privacy Mask	4 programmable privacy masks
Motion Detection	4 programmable motion areas
Noise Reduction	3D DNR
Language	English
Function	Brightness, Sharpness, Mirror, Smart Light
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity 90% or less (non-condensing)
Power Supply	12 VDC ± 25% <i>*You are recommended to use one power adapter to supply the power for one camera.</i>
Power Consumption	Max. 4.9 W
Protection Level	IP67
Material	Metal
White Light Range	Up to 40 m

Communication	HIKVISION-C
Dimensions	82.6 mm × 77.1 mm × 220.4 mm (3.25" × 3.04" × 8.68")
Weight	Approx. 565 g (1.25 lb.)

### Available Model

DS-2CE12HFT-F

### Dimension

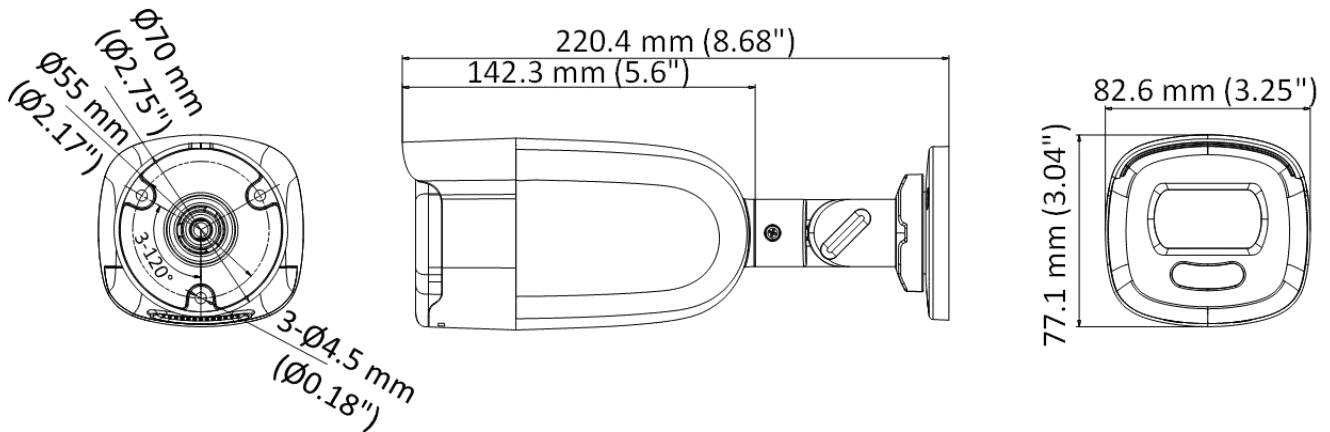

### Accessory



**DS-1280ZJ-XS**  
**Junction Box**

Distributed by

**HIKVISION****Headquarters**

No.555 Qianhai Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseas@hikvision.com

**Hikvision USA**

T +1-800-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**

T +61-2-8599-4233  
sales.au@hikvision.com

**Hikvision India**

T +91-22-29469900  
sales@pram@hikvision.com

**Hikvision Canada**

T +1-866-200-6680  
sales.canada@hikvision.com

**Hikvision Thailand**

T +662-275-9940  
sales.thailand@hikvision.com

**Hikvision Europe**

T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**

T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**

T +55-11-3518-0050  
latam.support@hikvision.com

**Hikvision Turkey**

T +90-312521-7070-7074  
sales.tr@hikvision.com

**Hikvision Malaysia**

T +601-2652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**

T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**

Tel: +27 (0) 0351177  
sales.africa@hikvision.com

**Hikvision France**

T +33011-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**

T +7-727-9730867  
nikla.pentov@hikvision.ru

**Hikvision Vietnam**

T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**

T +971-4-4452090  
sales.me@hikvision.com

**Hikvision Singapore**

T +65-6891-6718  
sg@hikvision.com

**Hikvision Spain**

T +34-91-727-18-55  
info.es@hikvision.com

**Hikvision Tashkent**

T +99-67-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**

T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**

T +7-495-629-07-99  
sales.ru@hikvision.com

**Hikvision Korea**

T +82-1031-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**

T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**

T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**

sales.colombia@hikvision.com