

DS-2CE76D3T-ITPF 2 MP EXIR Turret Camera



Key Feature

- 2 MP high-performance CMOS
- Ultra low light
- 1920 × 1080 resolution
- 2.8 mm, 3.6 mm, 6 mm fixed lens
- EXIR 2.0, smart IR, up to 30 m IR distance
- OSD menu, 3D DNR, 120 dB true WDR, day/night switch
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- HIKVISION-C





Specification

| Camera | |
|------------------------------|--|
| Image Sensor | 2.0 megapixel progressive scan CMOS |
| Signal System | PAL/NTSC |
| Video Frame Rate | PAL: 1080p@25fps NTSC: 1080p@30fps |
| Resolution | 1920 (H) ×1080 (V) |
| Min. Illumination | 0.005 Lux@(F1.2, AGC ON), 0 Lux with IR |
| Shutter Time | PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s |
| Slow Shutter | Max. 16 times |
| Lens | 2.8 mm, 3.6 mm, 6 mm |
| Horizontal Field of View | 106° (2.8 mm), 82° (3.6 mm), 51° (6 mm) |
| Lens Mount | M12 |
| Day & Night | IR cut filter |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360° |
| Synchronization | Internal synchronization |
| WDR (Wide Dynamic Range) | ≥ 120 dB |
| Menu | |
| AGC | High/Medium/Low |
| D/N Mode | Auto/Color/BW (Black and White) |
| Image Mode | STD/HIGH-SAT |
| HLC (Highlight Compensation) | Yes |
| BLC (Backlight Compensation) | Yes |
| WDR | Yes |
| 3D DNR | Level 1 to 9 |
| Language | English |
| Functions | Brightness, Sharpness, 3D DNR, Mirror, Smart IR |
| Interface | |
| Video Output | 1 HD analog output |
| Switch Button | TVI/AHD/CVI/CVBS |
| General | |
| Operating Conditions | -40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation) |
| Power Supply | 12 VDC ± 25% <i>*You are recommended to use one power adapter to supply the power for one camera.</i> |
| Power Consumption | Max. 4.6 W |
| Material | Plastic |
| IR Range | Up to 30 m |
| Dimensions | Φ 85.8 mm × 70 mm (Φ 3.38" × 2.76") |
| Weight | Approx. 127 g (0.28 lb.) |

Order Model

DS-2CE76D3T-ITPF

Dimension

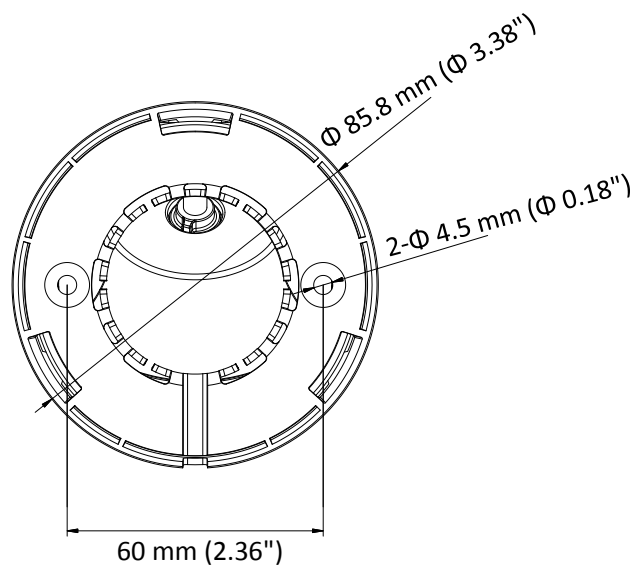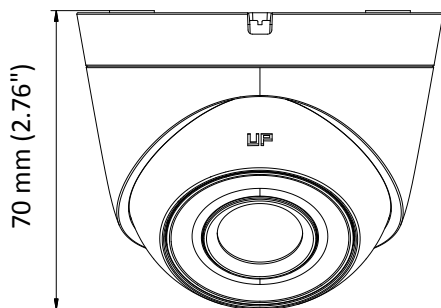

Accessory



DS-1272ZJ-110-TRS
Wall Mount







DS-1275ZJ-SUS
Vertical Pole Mount



DS-1276ZJ-SUS
Corner Mount



DS-1280ZJ-XS
Junction Box



Distributed by



HIKVISION

Headquarters

No. 555 Dianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5908
overseasbusiness@hikvision.com

Hikvision USA
T +1-800-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8699-4233
sales.au@hikvision.com

Hikvision India
T +91-20-29480000
sales@indiahikvision.com

Hikvision Canada
T +1-866-200-8690
sales.canada@hikvision.com

Hikvision Thailand
T +66-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-20-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55-11-3318-0050
latam.support@hikvision.com

Hikvision Turkey
T +90 312181521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-002140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (11) 0351172
sfafrica@hikvision.com

Hikvision France
T +33011-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-979067
info.pant@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vn@hikvision.com

Hikvision UAE
T +971-4-4432000
salesme@hikvision.com

Hikvision Singapore
T +65-6889-6718
sg@hikvision.com

Hikvision Spain
T +34-91-737-18-55
info.es@hikvision.com

Hikvision Tashkent
T +99-97-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2351-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-009-67-90
sales.ru@hikvision.com

Hikvision Korea
T +82-1031-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-60
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933758
Sales.indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com